




KK 102

Air Conditioner Control & Co-Aging Unit C€

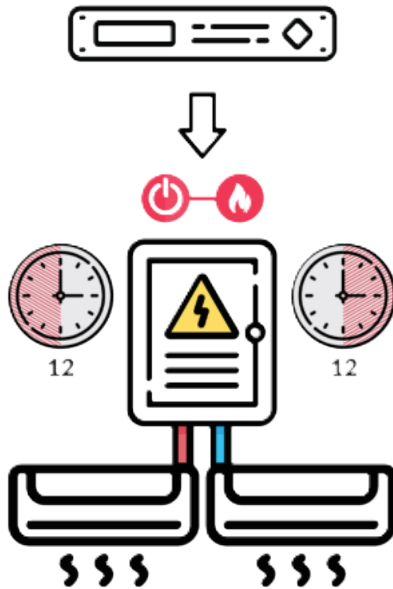

It enables 2 separate air conditioners to be operated sequentially at intervals of 12 hours a day. In the event that an air conditioner that must operate during the operating time interval fails or the system room cannot be cooled within the defined intervals, it also activates the standby air conditioner, enabling both air conditioners to be operated together and deactivating the backup air conditioner again when the system room temperature falls within the defined range.

In case of fire, the circulation in the room is stopped by ensuring that both air conditioners are completely turned off. In this way, the fire can be extinguished in a shorter time.

It is recommended for Split air conditioners with and air conditioners having Auto-restart feature.

DIMENSIONS

Width : 40 cm

Height : 40 cm

Depth : 20 cm

MOUNTING

Wall Mount

MONITORING & MANAGEMENT SOFTWARE

Sensaway Monitoring & Management Software

WEIGHT

12 kg

ALERT, WARNING & NOTIFICATION

Written and illuminated warning through LCD (*1)

Email (via management software)

SMS and Phone Call (through SMS Module)

Audible alert via management software

Audible - Visual warning module (Siren) (*2)

Sensaway Mobile App Notification

(*1) It works with BirSens modules.

(*2) It works with compatible BirSens modules & Siren.